


## Free site survey for tanks

Above ground industrial storage tanks and their contents are valuable assets that need to be protected. Adverse weather conditions or condensation can allow moisture to accumulate at the chine angle and track under the base leading to corrosion problems, leakage and catastrophic tank failure. The financial implications are not restricted to the cost of tank and contents, but also costs associated with environmental damage. Belzona Polymeric has developed a solution - Sealatank. The system provides complete protection by encapsulating the circumference of the tank base whilst allowing any residual moisture under the tank to permeate through the material's microporous structure. Unlike many conventional sealants the system is weatherproof, flexible and UV resistant with high adhesion properties for a long service life. For a free initial site survey visit [www.belzona.co.uk](http://www.belzona.co.uk)



Before sealing

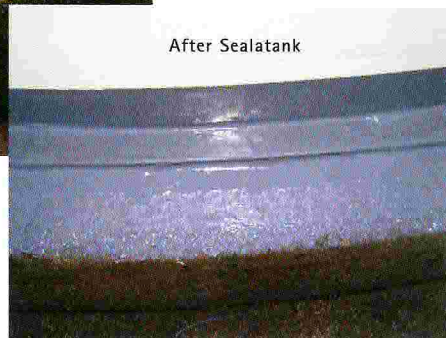

After Sealatank



## Holy grail of vehicle oil

BORPower® is a scientifically proven oil additive which improves fuel consumption. UK trials by vehicle engineering test specialists at the Motor Industry Research Association (MIRA) research facility produced fuel consumption savings of over 10%. BORPower is the only product with publicly declared tests and certificates from around the world and is based upon a physical process, not involving any chemical reaction with the engine oil; it is chemically inert. BORPower® is non-toxic and non-acidic and lasts for up to 40,000 miles. [www.nanoboron.co.uk](http://www.nanoboron.co.uk)

ELAFLEX

The transfer hoses the drivers are asking for!

- Very lightweight, up to 18% lighter than other makes
- Long service life. High abrasion resistance
- Very flexible. Easy to handle
- Clamp type safety couplings
- Many other applications, chemicals, AdBlue
- All our hoses are electrically conductive
- Coil lengths 45 mtrs (150ft), 54 mtrs (177ft) or 61 mtrs (200ft) others on request - LPG 40 mtr coils or cut lengths
- Usually available ex stock
- On site LPG hose testing by our own qualified engineers
- ELAFLEX clamp type safety couplings to EN 14420 for safe hose assembly

ELAFLEX LPG orange band product transfer hoses to EN1762

ELAFLEX XHD reeling hose to EN 1761 - Delivery hose 38mm (1½")

Call us now:  
Tel: 01992 452950  
Mob: 07831 595620  
Fax: 01992 452911

**ELAFLEX Ltd**  
Hoddesdon  
Herts, EN11 0PA  
[elaflex@aol.com](mailto:elaflex@aol.com)  
[www.elaflex.co.uk](http://www.elaflex.co.uk)

Check out the Alternative Metering System

TAILORED TO MEET INDIVIDUAL NEEDS

**Delivery system completely clear after each delivery**  
**No product chases**  
**Contamination virtually nil**  
**175' of empty hose with closure**  
**Adjustable flow rates**  
**Flow rates up to 900lpm**

**For more information:**  
**John Heidt, MD**  
**01562 822446**  
**[tps.auto@lineone.net](mailto:tps.auto@lineone.net)**

Transport & Plant Services Ltd